



Product name

Features

Construction

Service range


* Be sure to read the precautions concerning gas-type fluids.

Lineup

TOMBO No.

1120


CLINSIL™ Top

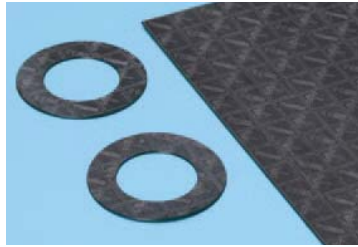


- Because the main constituent of this gasket is expanded graphite, it has excellent heat resistance, steam resistance, and corrosion resistance.
- Scratch resistant and flexible
- Can be used with relatively high temperature flanges, valves and equipment.

Main constituents: NBR, aramid fibers, expanded graphite


Water-type fluid

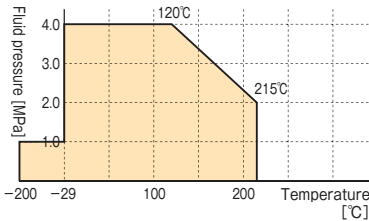

Oil-type fluid

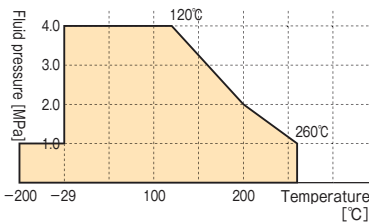

Gas-type fluid

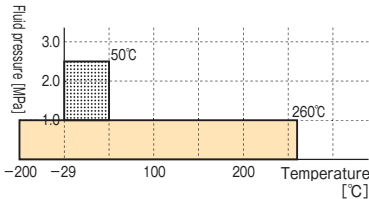

Regarding the shaded area, study it carefully before use.


TOMBO No. 1120-LN

This gasket is intended for use with low-temperature fluids, such as LNG. It is the TOMBO No. 1120 which has been specially treated.

TOMBO No.

1995


CLINSIL™ Brown

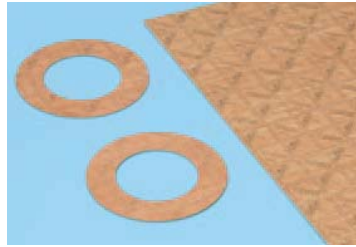

- Standard grade joint sheet
- Large-size gasket available
Can be manufactured without joints to a maximum of 3810 × 3810mm (9S size).
- Can be used with relatively low temperature flanges, valves and equipment.

Main constituents: NBR, aramid fibers, expanded graphite


Water-type fluid

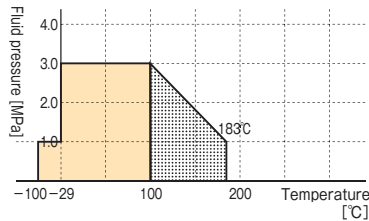

A rough guide to the service life of this gasket when it is used as a pipe gasket to seal steam of 100°C or higher is as follows.


▨ area: 1-2 years

Oil-type fluid

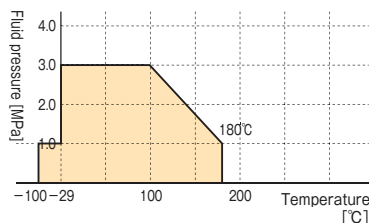

*Do not use this gasket with aromatic fluids.

Gas-type fluid

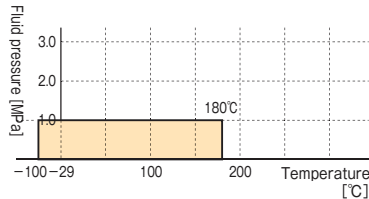


**TOMBO No. 1995-W
CLINSIL™ White**

This is a white joint sheet that has the same performance as the TOMBO No. 1995.

TOMBO No.

1993


CLINSIL™ Super

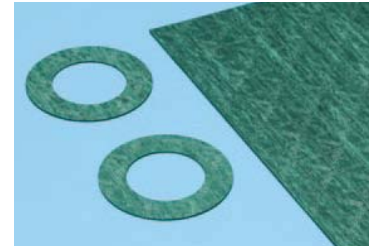

- This gasket has excellent heat resistance and steam resistance, making it suitable for use in a steam line.

Main constituents: Specially blended rubber, aramid fibers, inorganic filler


Water-type fluid

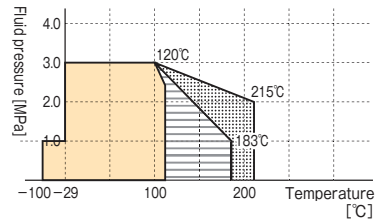

A rough guide to the service life of this gasket when it is used as a pipe gasket to seal steam of 100°C or higher is as follows.


▨ area: 5-10 years ▨ area: 1-2 years

Oil-type fluid

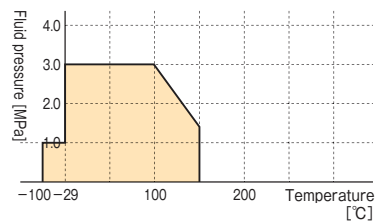

*Do not use this gasket with aromatic fluids.

Gas-type fluid

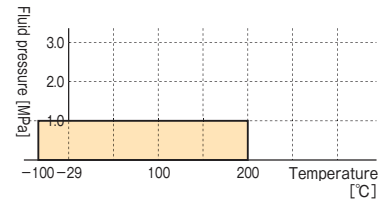

⚠ Do not use TOMBO No. 1993 for the gas-type fluid which even a minute amount of leakage is not allowed. Even for use with the water- or oil-type fluid, be sure to use paste when carrying out an airtightness test. It is recommended to use TOMBO No. 1133 or TOMBO No. 1120 instead.